


T-PROFIEL - GEWALST OF LASERGELAST ± 6 m - EN 10088-3 / DIN 1024

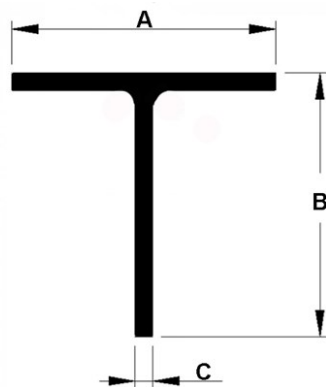

Artikelgroep : 859
 Uitvoering : Gewalst of lasergelast
 Norm : EN 10088-3
 Tolerantie : DIN 1024 (richtnorm)
 Handelslengten : 5 - 6 meter

Artikelcode	A	B	C	E	Kwaliteit
859-6017	20	20	3	L= ± 6 m	1.4301/1.4307
859-958	25	25	3	L= ± 6 m	1.4301/1.4307
859-17825	25	25	4	L= ± 6 m	1.4301/1.4307
859-959	30	30	4	L= ± 6 m	1.4301/1.4307
859-6030	30	30	4	L= ± 6 m	1.4301/1.4307
859-6031	30	30	4	L= ± 6 m	1.4571/1.4404
859-12546	40	40	4	L= ± 6 m	1.4301/1.4307
859-9143	40	40	4	L= ± 6 m	1.4571/1.4404
859-10062	40	40	5	L= ± 6 m	1.4301/1.4307
859-27353	40	40	5	L= ± 6 m	1.4571/1.4404
859-12188	50	50	5	L= ± 6 m	1.4301/1.4307
859-5215	50	50	5	L= ± 6 m	1.4571/1.4404
859-7159	50	50	6	L= ± 6 m	1.4301/1.4307
859-25407	50	50	6	L= ± 6 m	1.4571/1.4404
859-962	60	60	6	L= ± 6 m	1.4301/1.4307
859-28149	60	60	6	L= ± 6 m	1.4571/1.4404
859-963	70	70	7	L= ± 6 m	1.4301/1.4307
859-964	80	80	8	L= ± 6 m	1.4301/1.4307
859-28150	80	80	8	L= ± 6 m	1.4571/1.4404
859-965	90	90	9	L= ± 6 m	1.4301/1.4307
859-966	100	100	10	L= ± 6 m	1.4301/1.4307
859-15412	100	100	10	L= ± 6 m	1.4571/1.4404
859-7544	120	120	13	L= ± 6 m	1.4301/1.4307
859-27987	120	120	13	L= ± 6 m	1.4571/1.4404